

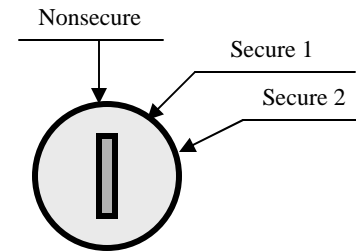


SuperNet G3 Quick Reference Guide

of Functions and Connections

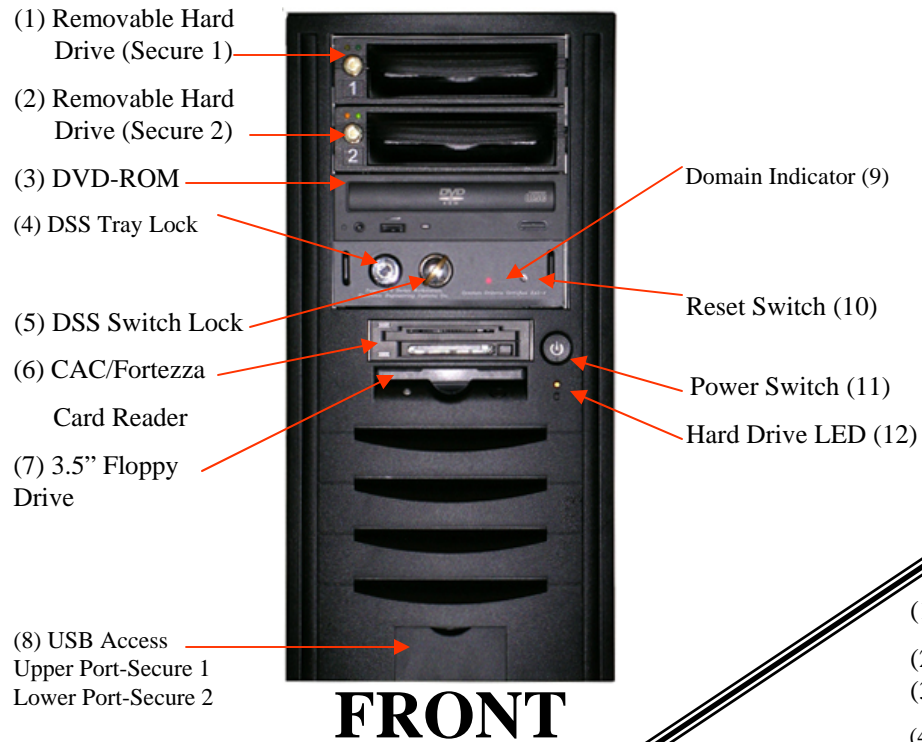

(5) DSS Positions

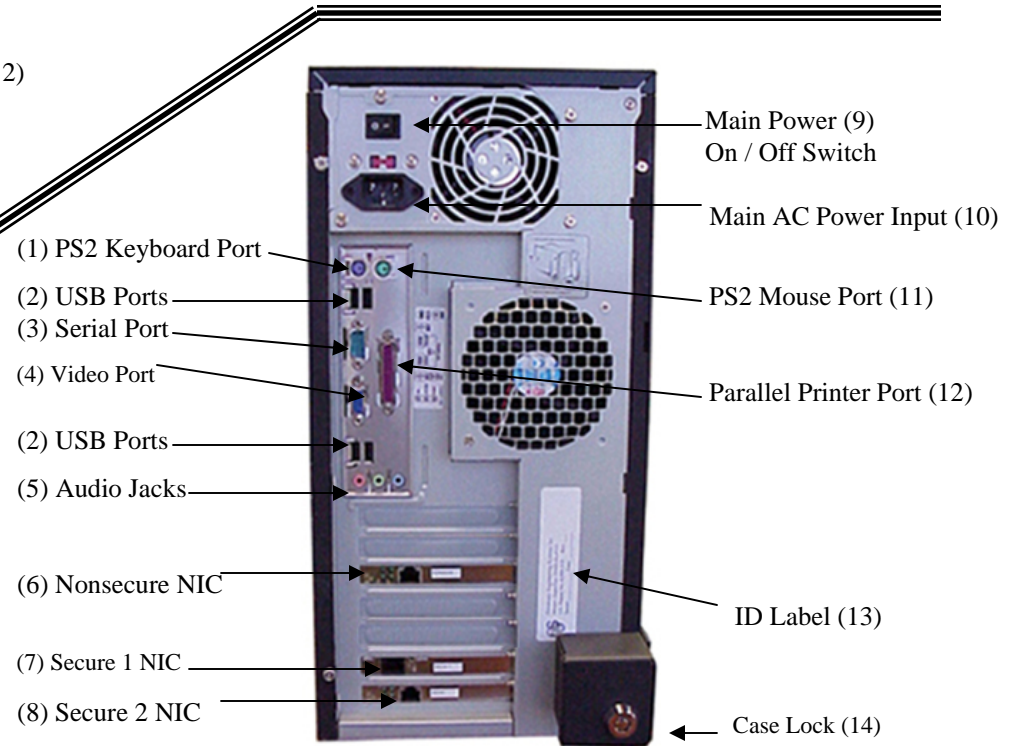

Notice: Before using, inspect labels, connections, and case for possible tampering. If possibly tampered, immediately notify security officer.

Functions and Connections (Front)

- (1) To remove Secure 1 hard drives for safe storage
- (2) To remove Secure 2 hard drives for safe storage
- (3) Plays DVDs and reads CD media
- (4) Locks DSS tray assembly in case
- (5) Selects Nonsecure, Secure 1 or Secure 2 domain
- (6) Read CAC & Fortezza cards simultaneously
- (7) Read and write to 3.5" floppy disks
- (8) Upper USB port active in Secure 1 domain only
Lower USB port active in Secure 2 domain only
- (9) Colored LED indicates active domain
- (10) Press to warm reboot computer
- (11) Powers up computer
- (12) Indicates hard drive activity

Functions and Connections (Rear)

- (1) Provides connection for PS2 style keyboard
- (2) Provides connection for USB devices
- (3) Provides connection for serial device
- (4) Provides connection to monitor video cable
- (5) Provides connection for audio inputs and outputs
- (6) Connects to Nonsecure network at 10/100/1000 mbs
- (7) Connects to Secure 1 network at 10/100/1000 mbs
- (8) Connects to Secure 2 network at 10/100/1000 mbs
- (9) Main power kill switch
- (10) Receptacle for 115/230 VAC input
- (11) Provides connection for PS2 style mouse
- (12) Provides connection to parallel printer cable
- (13) Provides data on computer model number and revision, patent number, and serial number
- (14) Locks case to prevent unauthorized access

Boot Instructions for Nonsecure Domain

1. DSS is in the Nonsecure position (no key)
2. Power on by depressing power switch (11)
3. Log-in as required
4. Proceed with normal operation

Boot Instructions for Secure 1 & 2 Domains

1. Insert DSS key into DSS lock (5)
2. Rotate DSS to Secure 1 or Secure 2 position
3. Power on by depressing power switch (11)
4. Log-in as required
5. Proceed with normal operation

IMPORTANT NOTICES!!!

Perform the standard system shutdown per applicable operating system guidelines prior to changing domains with the DSS.

**COMPUTER MUST BE POWERED OFF
FOR DSS TO BE ROTATED!!!**

**If the LED (9) for the selected domain fails to illuminate when the system is turned on, DO NOT use the system.
Notify the Security Officer.**

DSS access keys can only be inserted and removed when the DSS is in the Nonsecure position.

Access control and security administration of the DSS keys are the sole responsibility of the end user.

System Administrators must assign User and BIOS passwords as required for the security of the system.